

UP36-6



Specification		
Nominal Voltage	6V	
Nominal Capacity (20HR)	36.0AH	
Dimension	Length	161±1mm (6.34 inches)
	Width	87±1mm (3.43 inches)
	Container Height	163±1mm (6.42 inches)
	Total Height (with Terminal)	169±1mm (6.65 inches)
Approx Weight	Approx 5.5 kg (12.1lbs)	
Terminal	T2 / T3	
Container Material	ABS	
Rated Capacity	36.0 AH/1.80A	(20hr, 1.80V/cell, 25°C/77°F)
	33.5 AH/3.35A	(10hr, 1.80V/cell, 25°C/77°F)
	30.6 AH/6.12A	(5hr, 1.75V/cell, 25°C/77°F)
	27.5 AH/9.18A	(3hr, 1.75V/cell, 25°C/77°F)
	22.6 AH/22.6A	(1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	540A (5s)	
Internal Resistance	Approx 8mΩ	
Operating Temperature Range	Discharge: -15~50°C (5~122°F)	
	Change : 0~40°C (32~104°F)	
	Storage : -15~40°C (5~104°F)	
Nominal Operating Temperature Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 12.6A.Voltage. 7.2V~7.5V at 25°C(77°F)Temp. Coefficient -15mV/°c	
Standby Use	No limit on Initial Charging Current Voltage. 6.75V~6.9V at 25°C(77°F)Temp. Coefficient -10mV/°C	
Capacity affected by Temperature	40°C (104°F) 103%	
	25°C (77°F) 100%	
	0°C (32°F) 86%	
Self Discharge	Batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required.	

Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	68.6	52.6	43.6	37.7	29.2	21.5	18.1	10.7	8.38	6.81	5.55	4.82	3.89	3.25	1.78
1.80V/cell	92.0	67.3	52.7	44.6	34.4	25.0	20.3	11.7	9.01	7.27	5.96	5.17	4.12	3.35	1.80
1.75V/cell	103.8	73.9	57.6	47.9	35.7	25.9	21.2	12.1	9.18	7.43	6.12	5.31	4.19	3.44	1.82
1.70V/cell	114.3	80.6	61.4	50.4	37.2	27.0	21.9	12.4	9.44	7.63	6.27	5.42	4.25	3.51	1.85
1.65V/cell	126.0	86.9	65.3	53.5	39.2	27.6	22.4	12.6	9.84	7.89	6.45	5.54	4.32	3.58	1.88
1.60V/cell	139.0	94.4	69.9	57.0	41.4	28.8	22.6	13.1	10.1	8.14	6.66	5.66	4.36	3.62	1.89

Constant Power Discharge (Watts) at 25°C (77°F)




F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	125.3	97.2	81.4	71.1	55.6	41.3	34.9	20.8	16.3	13.3	10.9	9.48	7.67	6.43	3.53
1.80V/cell	166.5	122.8	97.0	82.8	64.6	47.6	38.9	22.5	17.5	14.1	11.6	10.12	8.12	6.62	3.56
1.75V/cell	183.7	132.8	104.6	88.2	66.5	49.0	40.5	23.3	17.7	14.4	11.9	10.37	8.24	6.78	3.59
1.70V/cell	196.7	141.4	110.2	92.0	68.8	50.7	41.7	23.8	18.2	14.8	12.2	10.57	8.34	6.92	3.65
1.65V/cell	213.8	151.2	116.2	97.0	72.0	51.5	42.3	24.0	18.9	15.2	12.5	10.76	8.45	7.05	3.70
1.60V/cell	230.4	160.4	122.3	102.2	75.5	53.4	42.5	24.9	19.4	15.6	12.8	10.96	8.52	7.11	3.71




UP36-6

Dimensions


T2 Terminal
Unit: mm [inches]




Discharge Characteristics

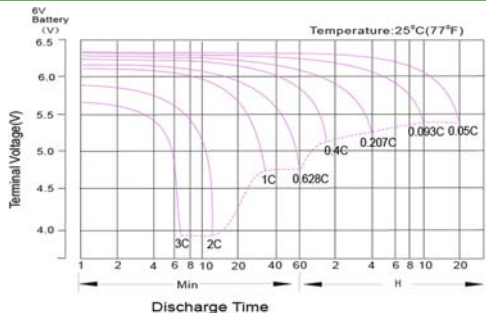


Effect of Temperature on Long Term Float Life

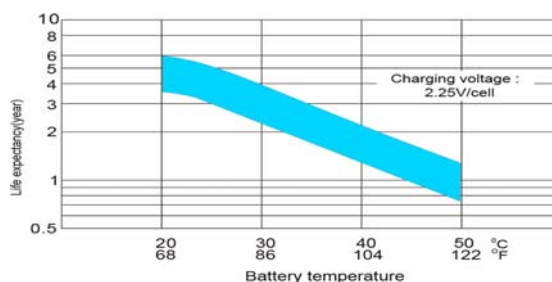


Float Charging Characteristics

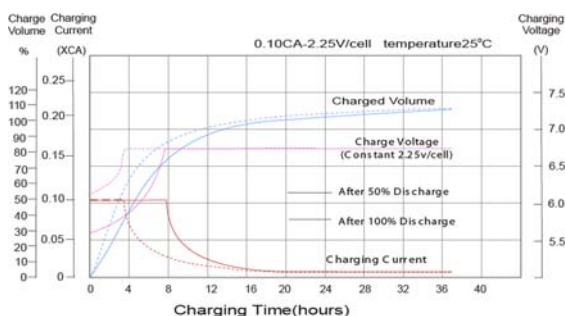

Cycle Life in Relation to Depth of Discharge

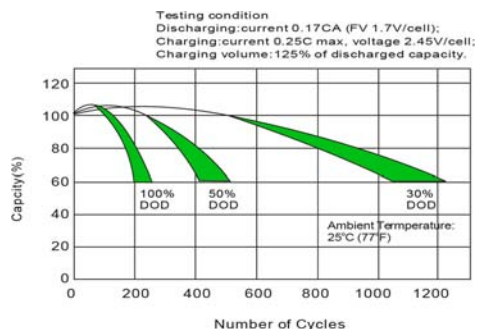

Temperature Effects in Relation to Battery Capacity

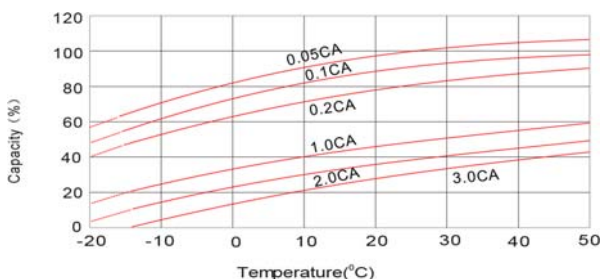

Self Discharge Characteristics

