

UP-G110-12



Specification		
Nominal Voltage	12V	
Nominal Capacity (20HR)	110.0AH	
Dimension	Length	410±3mm (16.14 inches)
	Width	177±2mm (6.97 inches)
	Container Height	225±3mm (8.86 inches)
	Total Height (with Terminal)	225±3mm (8.86 inches)
Approx Weight	Approx 36.0 kg (79.38lbs)	
Terminal	T11	
Container Material	ABS	
Rated Capacity	110.0 AH/5.50A	(20hr, 1.80V/cell, 25°C/77°F)
	102.3 AH/10.23A	(10hr, 1.75V/cell, 25°C/77°F)
	88.0 A H/17.6A	(5hr, 1.75V/cell, 25°C/77°F)
	76.5 AH/25.5A	(3hr, 1.75V/cell, 25°C/77°F)
	60.5 AH/60.5A	(1hr, 1.67V/cell, 25°C/77°F)
Max. Discharge Current	990A (5s)	
Internal Resistance	Approx 4.8mΩ	
Operating Temperature Range	Discharge:	-20~55°C (-4~131°F)
	Change :	0~40°C (32~104°F)
	Storage :	-20~50°C (-4~122°F)
Nominal Operating Temperature Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 22A.Voltage. 14.4V~15.0V at 25°C (77°F) Temp. Coefficient -30mV/°C	
Standby Use	No limit on Initial Charging Current Voltage. 13.5V~13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	Batteries may be stored for up to 9 months at 25°C (77°F) and then a freshening charge is required.	

Constant Current Discharge (Amperes) at 25°C (77°F)														
F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	93.1	73.0	55.7	46.6	29.6	22.6	18.7	16.1	13.9	12.3	11.1	10.2	9.60	5.28
1.80V/cell	106.6	81.6	61.5	51.5	32.0	24.2	19.8	16.9	14.6	12.9	11.6	10.7	10.0	5.50
1.75V/cell	119.8	89.8	66.4	55.1	33.9	25.5	20.7	17.6	15.1	13.4	12.0	11.0	10.23	5.61
1.70V/cell	129.0	96.1	70.5	58.3	36.0	26.6	21.4	18.2	15.7	13.8	12.4	11.3	10.5	5.68
1.67V/cell	134.3	99.9	73.0	60.5	36.9	27.4	21.9	18.5	15.9	14.0	12.6	11.4	10.6	5.74
1.60V/cell	145.5	106.9	78.5	64.2	38.4	28.5	22.8	19.1	16.3	14.3	12.8	11.7	10.8	5.82




Constant Power Discharge (Watts/cell) at 25°C (77°F)														
F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	178.1	140.7	108.1	90.8	57.8	44.2	36.7	31.8	27.6	24.5	22.1	20.2	19.1	10.5
1.80V/cell	201.3	155.8	118.3	99.7	62.3	47.2	38.8	33.3	28.8	25.5	23.1	21.2	20.0	11.0
1.75V/cell	223.8	169.8	127.0	106.2	65.8	49.7	40.5	34.5	29.8	26.4	23.8	21.8	20.3	11.2
1.70V/cell	238.4	180.3	133.8	111.7	69.4	51.6	41.7	35.5	30.7	27.2	24.5	22.4	20.8	11.3
1.67V/cell	245.4	185.3	137.6	115.3	70.9	53.0	42.6	36.1	31.2	27.5	24.8	22.6	21.0	11.4
1.60V/cell	263.0	196.5	146.7	121.7	73.4	54.9	44.1	37.1	31.8	28.0	25.2	23.1	21.4	11.5




UP-G110-12

Dimensions


T11 Terminal
Unit: mm [inches]




Discharge Characteristics

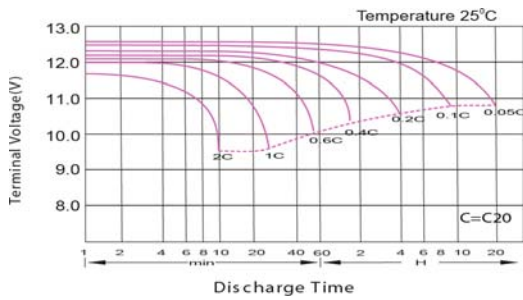


Effect of Temperature on Long Term Float Life

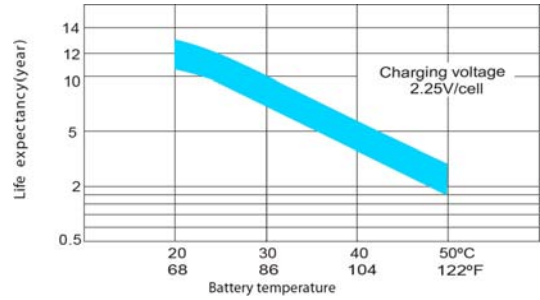


Float Charging Characteristics

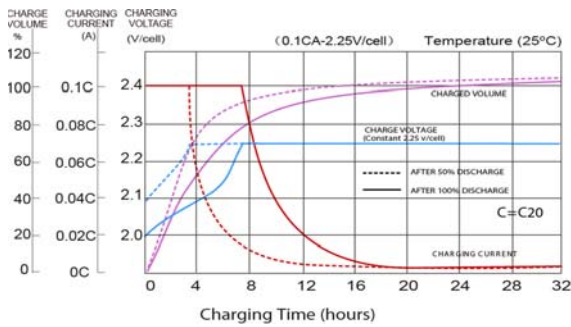

Cycle Life in Relation to Depth of Discharge

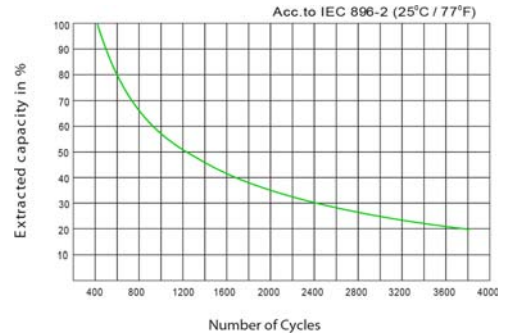

Temperature Effects in Relation to Battery Capacity

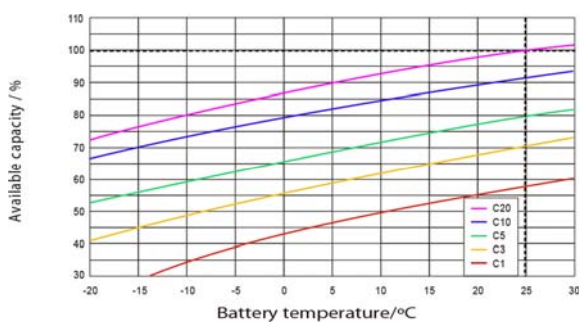

General Relation of Capacity VS. Storage Time

