
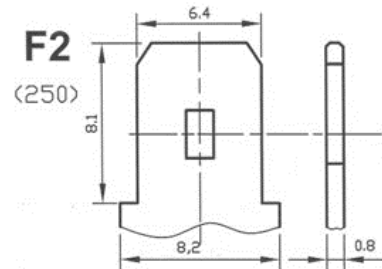


UP-G1&-12

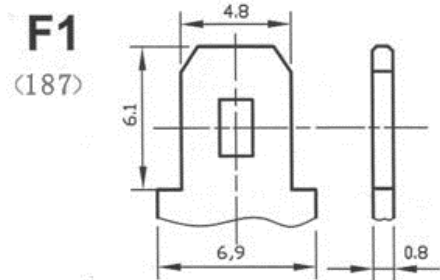

General Features

- Designed life 15 years in stand-by application
- Superior Deep Cycle Design
- High Power Density
- Thick Plates and High-density Active Material
- Longer Life in Deep Cycle Applications
- Excellent Recovery from Deep Discharge
- Wide operating temperature range from -10°C~ 50°C

Application

- Measuring equipment and instrument
- Telephone sets
- Lighting equipment
- Security systems
- UPS power supply

PHYSICAL SPECIFICATIONS		
Nominal Voltage		
	12V	
Nominal Capacity (20HR)		
	12AH	
Dimensions	Length	151±2mm
	Width	98±1mm
	Container height	95±1mm
	Total Height (with terminal)	99±1mm
Weight±3%		
	Approx 3.75Kg(8.26lbs)	
Internal Resistance(In full charge status)		
	≈22.2mΩ	
Standard Terminals		
	F1/F2(standard)	



