

UP Series

SPO225

SOLAR POWER OPEN




Product Design Features

- Maintenance free product (SMF).
- Power Supply & Starting power suitable.
- More than 300 cycles at 75% D.O.D.
- More than 800 cycles IEC 61427.
- High resistance to deep and repetitive discharge cycles.
- Internal gas recombination efficiency 98%-99%.
- One-way valve regulated system with flame-arrestor.
- Delivered ready for use at 100% of its nominal capacity.
- Long Service Life.

Specifications

Nominal Voltage (V)	12	
Nominal Capacity (Ah)	C20	200
	C100	225
Electrolyte density	1.290 ± 0.015g/ml	
Dimension	Length	518 mm (20.3 inches)
	Width	274 mm (10.7 inches)
	Height	242 mm (9.5 inches)
Approx. Weight (kg)	56.8	
Terminals	Standard cone	
Handles	Yes (2)	
QTY / PLT / Layer	18 / 1 / 3	

Battery Layout

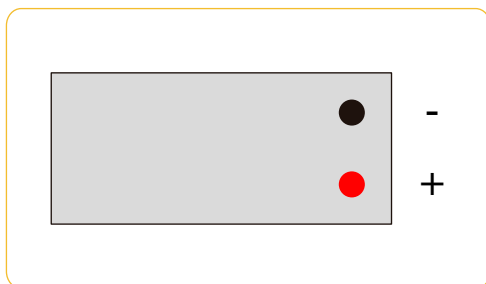

Certification



Capacity vs Operating Temperature

